



PRINCIPALS DIMENSIONS (DIMENSIONS PRINCIPALES)


wall thickness guide (guide des epaisseur de mur)



0" x 1/2" (0mm x 13mm)




1/4" x 3/4" (6mm x 19mm)



1/2" x 1" (13mm x 25mm)



1" x 1-1/2" (25mm x 38mm)



1-1/2" x 2" (38mm x 50mm)



2" x 2-1/2" (50mm x 63mm)

CONSTRUCTION DETAILS (DETAILS DE CONSTRUCTION)

seal (joint d'etancheite)



rubber trim (bordure de caoutchouc)

1/4" fixed tempered glass (vitre trempee fixe de 6mm)

3/16" sliding tempered glass (vitre trempee coulissante de 5mm)

glass run channel (rainure de vitre coulissante)

CLAMPING DETAILS (DETAILS D'ANCRAGE)

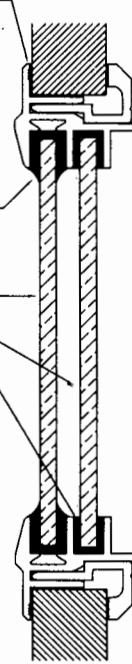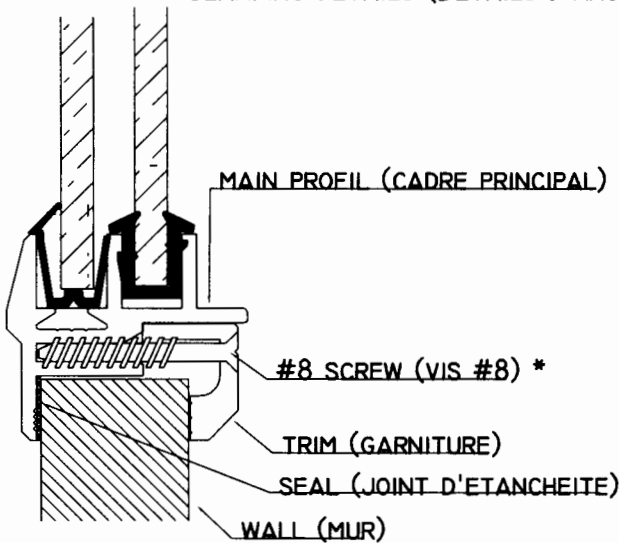

**BOMON MARINE**

**INFORMATION SHEET #2**

**FEUILLET D'INFORMATION #2**

**CLAMP TYPE OPENING WINDOW**

**FENETRE OUVRANTE TYPE A BRIDE**

\*SCREWS LENGTH: (wall thickness between 0" and 1/2" ) lenght = wall thickness + 3/4"

(wall thickness between 1/2" and 2-1/2" ) lenght = wall thickness + 1/4"

\*LONGUEUR DES VIS: (epaisseur du mur entre 0mm et 13mm) longueur = epaisseur du mur + 19mm

(epaisseur du mur entre 13mm et 63mm) longueur = epaisseur du mur + 6mm